200-06201 Wind Tracker Connections

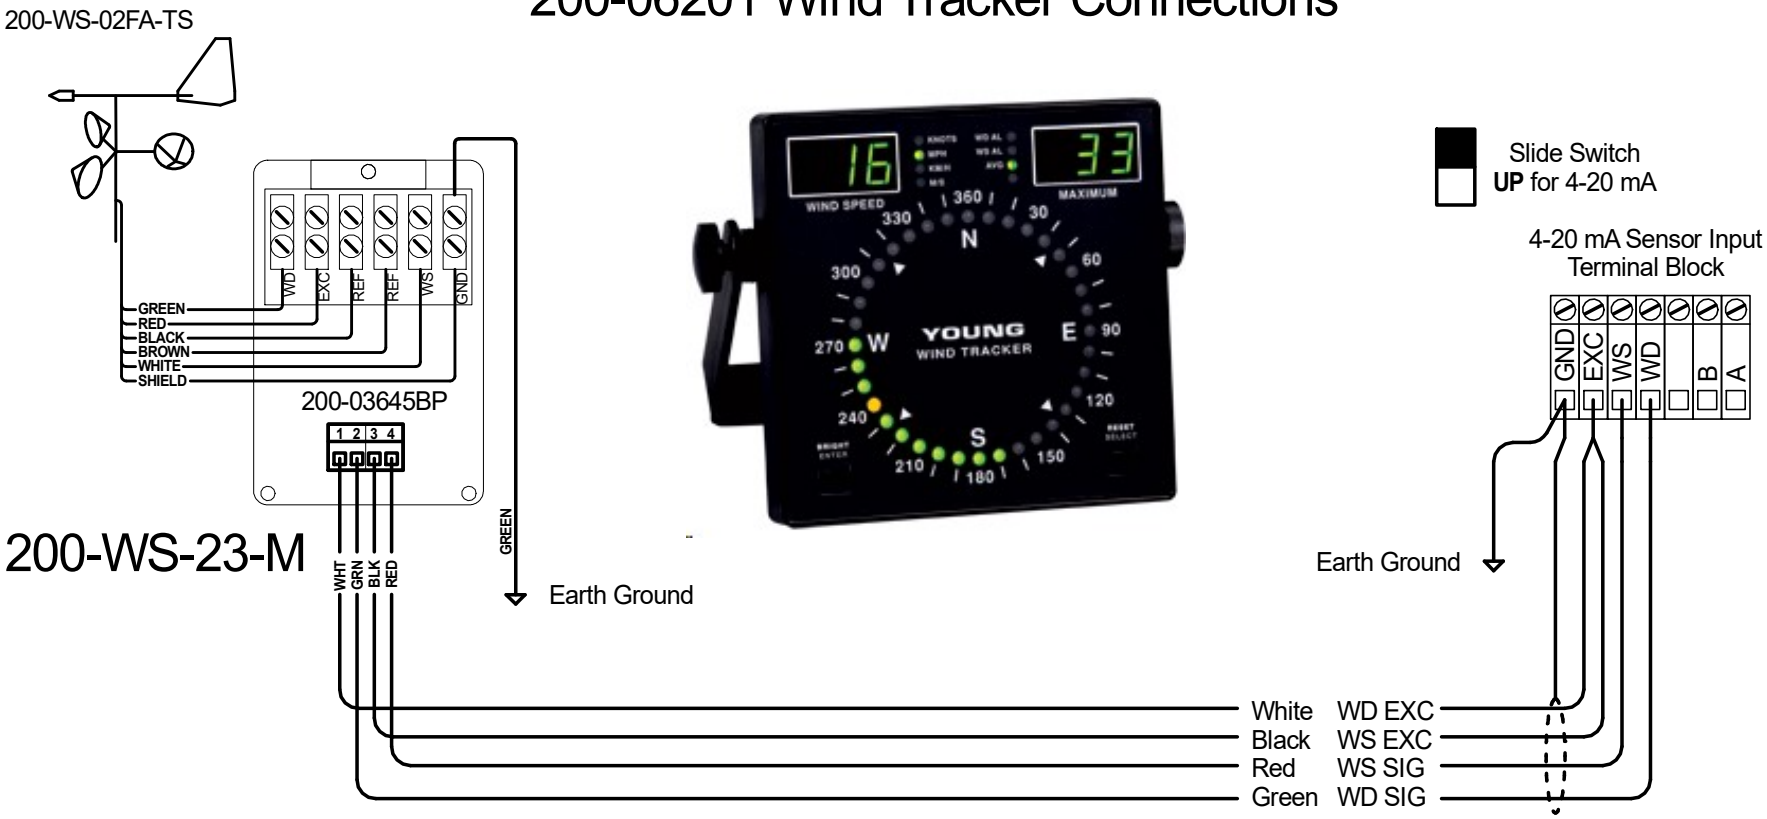

Setup for 200-WS-23-M:

Pin 2 0-360 degrees = 4-20 mA
Pin 4 0-50 meters / second = 4-20 mA

Program WindTracker:

1) Set slide switch UP
2) Press both ENTER and SELECT for about 4 seconds to enter program mode
   Use the SELECT key to scroll through the options
   Use the ENTER key to select the following:

   InP Ldi Line Driver 4-20mA input (0-50 meters / second)

NOVALYNX CORPORATION C

TITLE
RM Young Wind Tracker
with 200-WS-23-M

SHEET 1 OF 1

BY JDC
DATE 3-25-2026
SCALE FULL
DWG. NO. 830-0025-02